

NC-B

12-70



FEM
Technical Data

LIEBHERR

Tower Cranes

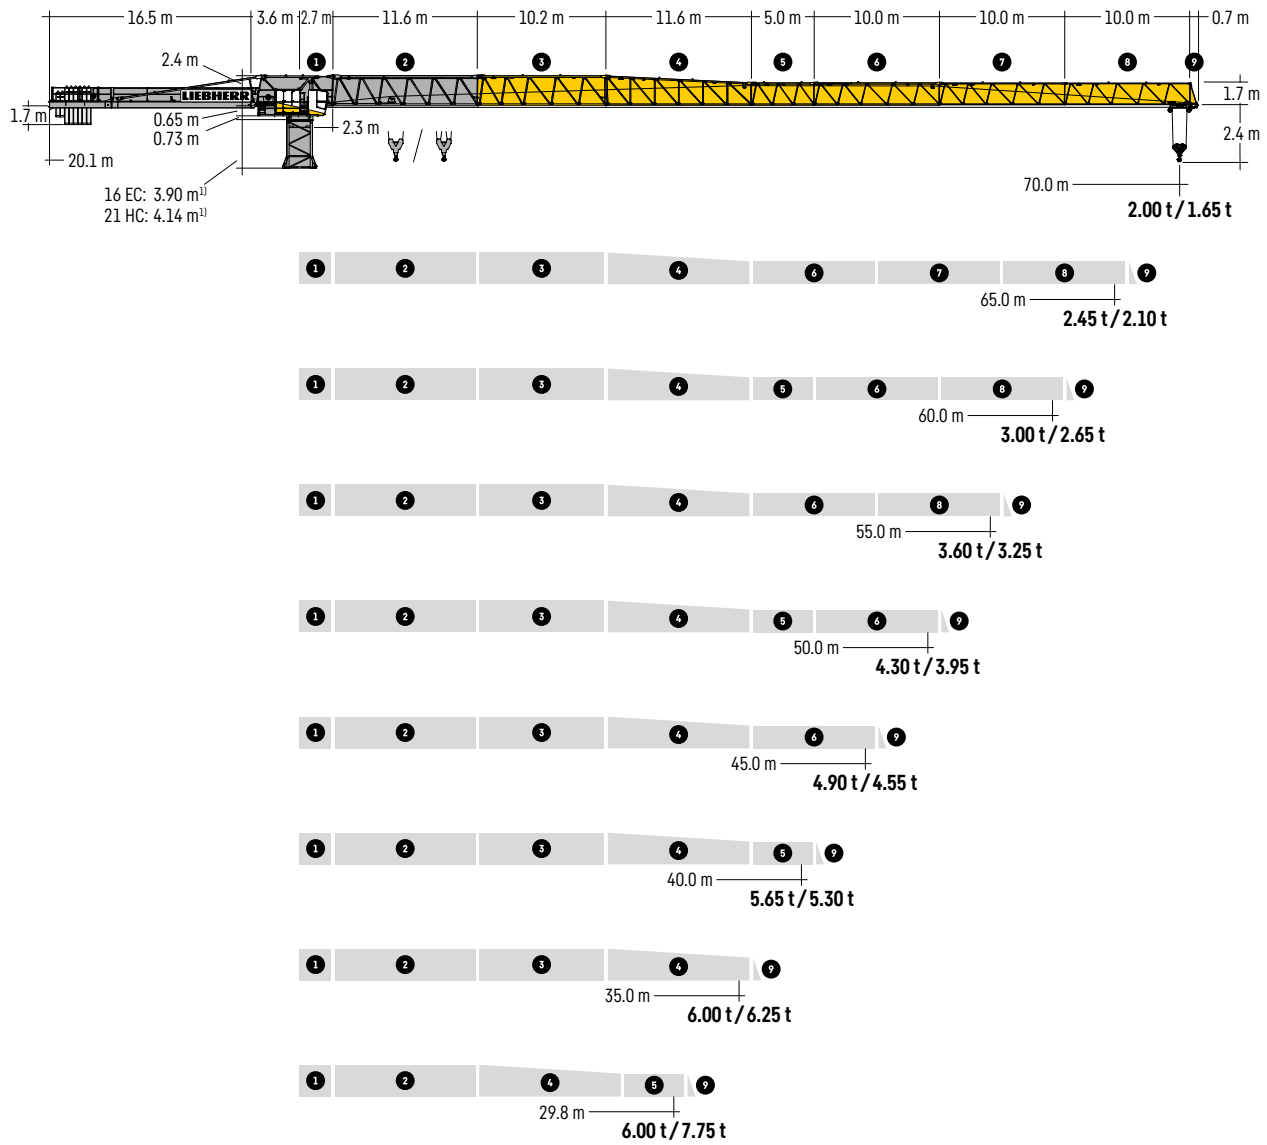
FEM

NC-B 12-70



Radius and capacity	04
Crane superstructures	06
Hoisting height	07
Internal climbing	09
External climbing	09
Driving units	10
Counterweight	11
Transport	11
Packing List	12


Radius and capacity




Lifting capacities valid up to 50 m hoisting height.

³¹ Tower section or climbing tower section

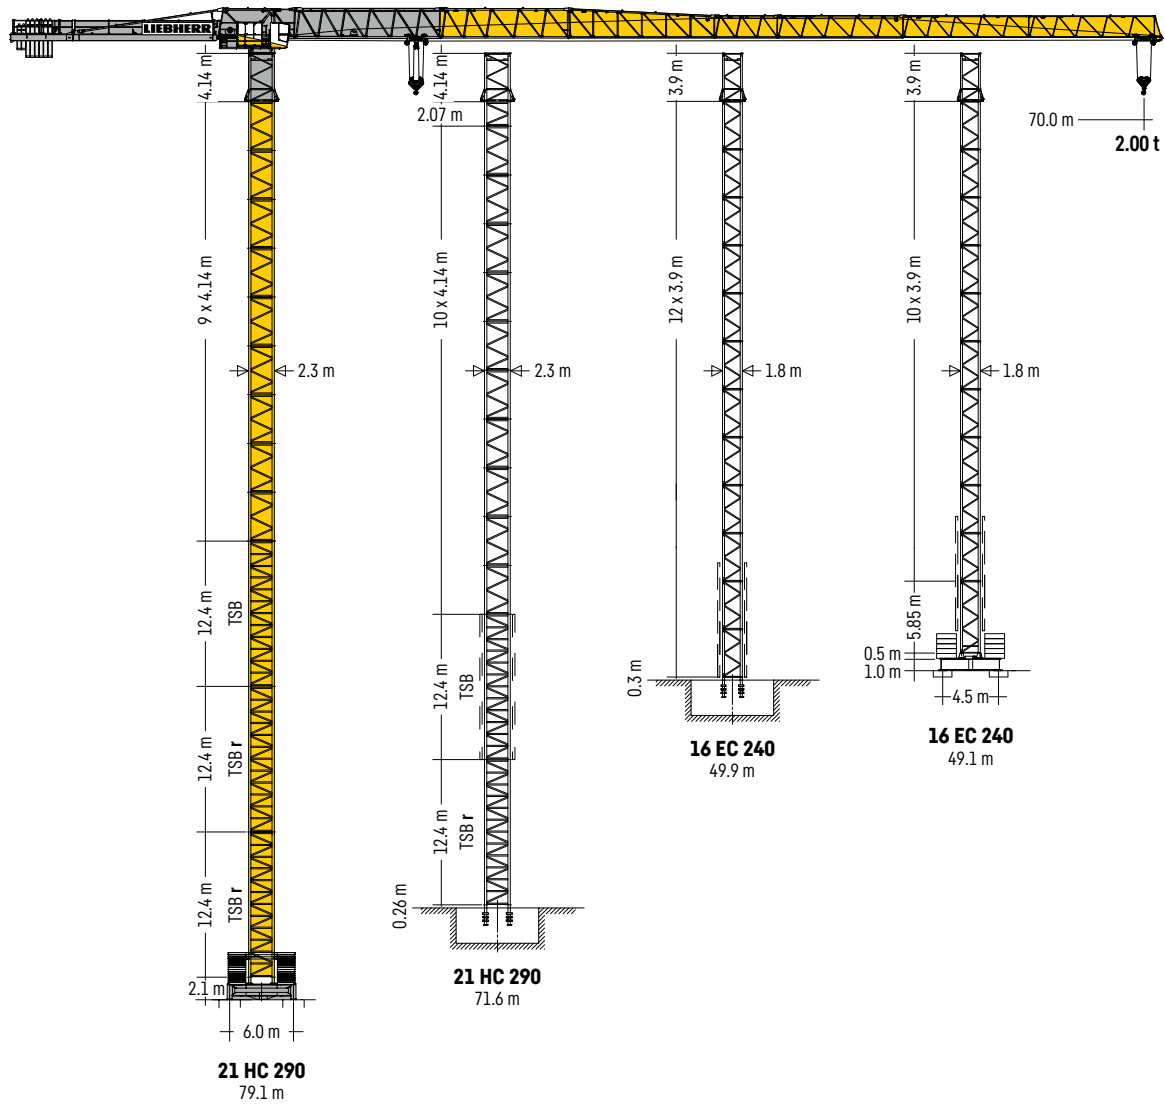
NC-B 12-70

				m										
m	r	m	t	20.0	25.0	29.8	35.0	40.0	45.0	50.0	55.0	60.0	65.0	70.0
70.0	(r=71.7)	2.6 - 29.4	6	6.00	5.90	4.85	4.12	3.56	3.12	2.76	2.46	2.21	2.00	
65.0	(r=66.7)	2.6 - 31.6	6	6.00		5.31	4.52	3.91	3.43	3.04	2.72	2.45		
60.0	(r=61.7)	2.6 - 34.0	6	6.00		5.80	4.94	4.29	3.77	3.35	3.00			
55.0	(r=56.7)	2.6 - 36.0	6	6.00			5.30	4.60	4.05	3.60				
50.0	(r=51.7)	2.6 - 37.8	6	6.00			5.62	4.88	4.30					
45.0	(r=46.7)	2.6 - 38.0	6	6.00			5.64	4.90						
40.0	(r=41.7)	2.6 - 38.0	6	6.00			5.65							
35.0	(r=36.7)	2.6 - 35.0	6	6.00										
29.8	(r=31.5)	2.6 - 29.8	6	6.00										

				m										
m	r	m	t	20.0	25.0	29.8	35.0	40.0	45.0	50.0	55.0	60.0	65.0	70.0
70.0	(r=71.7)	2.6 - 16.3	12	9.27	6.98	5.58	4.52	3.78	3.22	2.77	2.41	2.11	1.86	1.65
65.0	(r=66.7)	2.6 - 17.5	12	10.11	7.64	6.12	4.98	4.18	3.57	3.09	2.69	2.37	2.10	
60.0	(r=61.7)	2.6 - 18.7	12	11.03	8.35	6.71	5.47	4.61	3.94	3.42	3.00	2.65		
55.0	(r=56.7)	2.6 - 19.7	12	11.78	8.94	7.19	5.88	4.96	4.25	3.70	3.25			
50.0	(r=51.7)	2.6 - 20.6	12	12.00	9.47	7.62	6.24	5.27	4.53	3.95				
45.0	(r=46.7)	2.6 - 20.7	12	12.00	9.50	7.65	6.26	5.29	4.55					
40.0	(r=41.7)	2.6 - 20.7	12	12.00	9.51	7.66	6.27	5.30						
35.0	(r=36.7)	2.6 - 20.6	12	12.00	9.48	7.63	6.25							
29.8	(r=31.5)	2.6 - 20.9	12	12.00	9.62	7.75								

t

Crane superstructures



Lifting capacities valid up to 50 m hoisting height.

Hoisting height



3.90 m + 5.85 m		16 EC 240		
12		49.9 ¹⁾	-	-
	10 + 1	48.0 ¹⁾	49.1 ¹⁾	-
11		46.0 ¹⁾	47.2 ¹⁾	47.9 ¹⁾
	9 + 1	44.1	45.2 ¹⁾	46.0 ¹⁾
10		42.1	43.3	44.0 ¹⁾
	8 + 1	40.2	41.3	42.1
9		38.2	39.4	40.1
	7 + 1	36.3	37.4	38.2
8		34.3	35.5	36.2
	6 + 1	32.4	33.5	34.3
7		30.4	31.6	32.3
	5 + 1	28.5	29.6	30.4
6		26.5	27.7	28.4
	4 + 1	24.6	25.7	26.5
5		22.6	23.8	24.5
	3 + 1	20.7	21.8	22.6
4		18.7	19.9	20.6
	2 + 1	16.8	17.9	18.7
3		14.8	16.0	16.7
	1 + 1	12.9	14.0	14.8
2		10.9	12.1	12.8
	0 + 1	9.0	10.1	10.9
1		7.0	8.2	8.9
0		3.1	4.3	5.0
		m	m	m
		20 EC 300 FA	20 EC 300 CB-0450m	20 EC 300 CB-0450dm

Further hoist heights and jib lengths as well as climbing inside the building on request.



Hoisting height




4.14 m + 2.07 m		21 HC 290					
12		53.0 ¹⁾	-	-	54.0 ¹⁾	-	-
	11 + 1	50.9 ¹⁾	-	-	52.0 ¹⁾	-	-
11		48.9	61.3 ¹⁾	-	49.9	-	-
	10 + 1	46.8	59.2 ¹⁾	71.6 ¹⁾	47.8	63.9 ¹⁾	-
10		44.7	57.1 ¹⁾	69.6 ¹⁾	45.8	61.8 ¹⁾	-
	9 + 1	42.7	55.1	67.5	43.7	59.8	-
9		40.6	53.0	65.4	41.6	57.7	79.1 ¹⁾
	8 + 1	38.5	50.9	63.4	39.6	55.6	77.0 ¹⁾
8		36.4	48.9	61.3	37.5	53.6	74.9 ¹⁾
	7 + 1	34.4	46.8	59.2	35.4	51.5	72.9
7		32.3	44.7	57.1	33.3	49.4	70.8
	6 + 1	30.2	42.7	55.1	31.3	47.3	68.7
6		28.2	40.6	53.0	29.2	45.3	66.7
	5 + 1	26.1	38.5	50.9	27.1	43.2	64.6
5		24.0	36.5	48.9	25.1	41.1	62.5
	4 + 1	22.0	34.4	46.8	23.0	39.1	60.5
4		19.9	32.3	44.7	20.9	37.0	58.4
	3 + 1	17.8	30.2	42.7	18.9	34.9	56.3
3		15.8	28.2	40.6	16.8	32.9	54.2
	2 + 1	13.7	26.1	38.5	14.7	30.8	52.2
2		11.6	24.0	36.5	12.6	28.7	50.1
	1 + 1	9.5	22.0	34.4	10.6	26.6	48.0
1		7.5	19.9	32.3	8.5	24.6	46.0
	0 + 1	5.4	17.8	30.2	6.4	22.5	43.9
0		3.3	15.8	28.2	4.4	20.4	41.8
		m	m	m	m	m	m

21 HC 290 FA	21 HC 290 FA r	21 HC 290 FA r	21 HC 290 CB-0450	21 HC 290 UC-0600	24 HC 420 CB-0600

Further hoist heights and jib lengths as well as climbing inside the building on request.

r = reinforced



Internal climbing

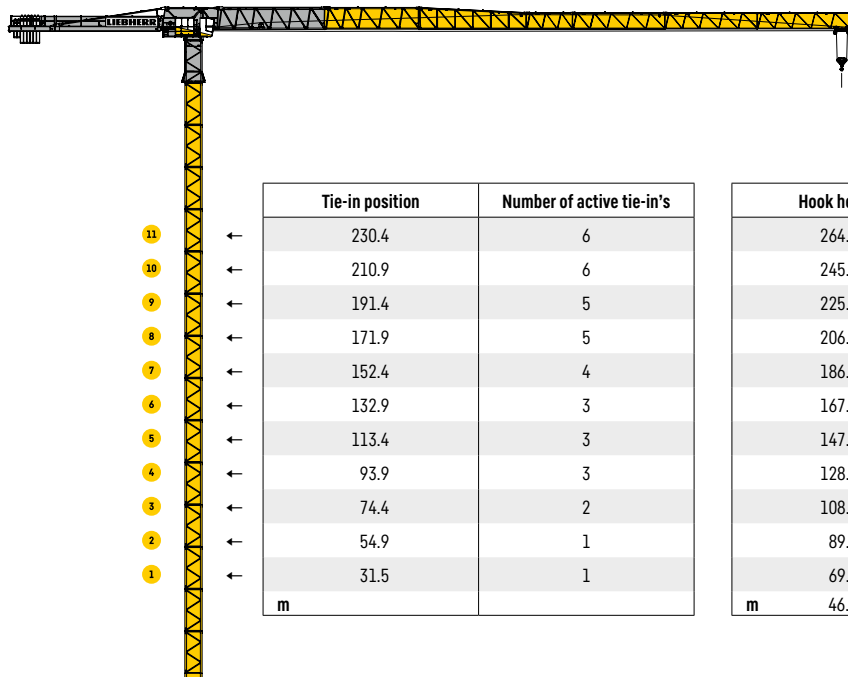
Dimensions and tower height

16 EC 240			
			Shaft opening
pcs	tower height ²⁾	he (min. - max.)	
12	46.8	9.0 - 15.0	
11	42.9	8.5 - 15.0	
10	39.0	8.0 - 15.0	
9	35.1	8.0 - 15.0	
8	31.2	8.0 - 13.0	
m		m	
			Floor opening³⁾

²⁾ For details please refer to the operating manual.

³⁾ Min. floor opening dimension. More details on request.

External climbing⁴⁾



⁴⁾ All data's calculated with 16 EC 240.


Driving units

3 ↓ 45 kW FU

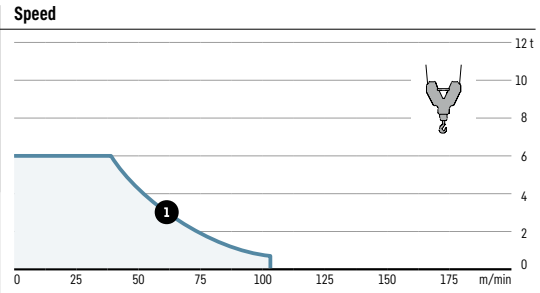
HOW 260 MZ 001

⊗ kVA: 64.0
max. 276.5 m / 138.0 m⁵⁾

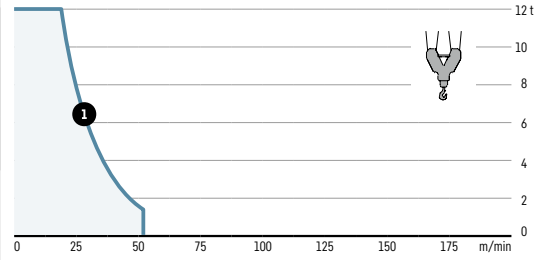
8 Layers ↔ stepless



	t	m/min
1	6.00	0 ↔ 39
	0.70	0 ↔ 103



1	12.00	0 ↔ 19
	1.40	0 ↔ 52




3 ↓ 65 kW FU

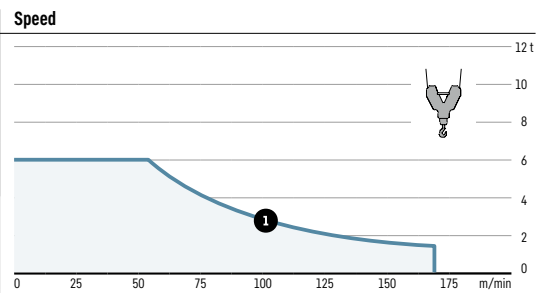
HOW 280 MZ 001

⊗ kVA: 83.0
max. 500.0 m / 250.0 m⁵⁾

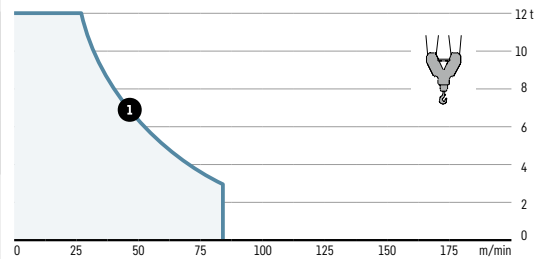
10 Layers ↔ stepless



	t	m/min
1	6.00	0 ↔ 54
	1.45	0 ↔ 169



1	12.0	0 ↔ 27
	3.05	0 ↔ 84



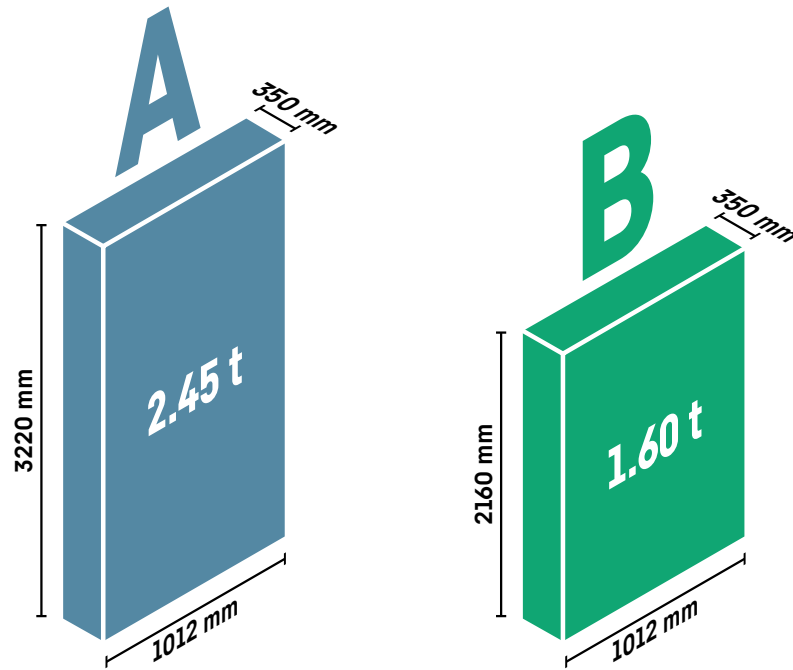
0 ↔ 0.6 U/min · sL/min · tr./min
3 x 5.0 kW FU



0 ↔ 87.1 m/min
5.5 kW FU



⁵⁾ Further hoist load data: see instruction manual.

Counterweight



3 ↓ 45 kW FU⁶⁾

HOW 260 MZ 001

m		Counterweight		t	Hoists								
		B	A										
70.0	two-piece	1	+	7	18.75	B	A	A	A	A	A	A	A
65.0				7	17.15		A	A	A	A	A	A	A
60.0				7	17.15		A	A	A	A	A	A	A
55.0			2	+	5	15.45		B	B	A	A	A	A
50.0			2	+	5	15.45		B	B	A	A	A	A
45.0			1	+	5	13.85			B	A	A	A	A
40.0			2	+	4	13.00			B	B	A	A	A
35.0			1	+	4	11.40				B	A	A	A
29.8			1	+	3	8.95					B	A	A

Transport

 70 m







































⁶⁾ Representation of additional hoists: see instruction manual.

⁷⁾ Before assembling the jib: Attach required counterweight blocks A to counter jib (marked bold in table).















Packing List

Erection weights: see instruction manual.











Upper part of crane

I _i	Q _i	Description		
1	1	Slewing platform with slewing ring and slewing ring support	 2.46 m (L)  4,890 kg	 2.50 m (W) 2.66 m (H)
2	1	Cabin with platform	 5.67 m (L)  1,780 kg	 1.83 m (W) 2.36 m (H)
3	1	Counter-jib part 1/2	 11.61 m (L)  3,150 kg	 1.44 m (W) 1.65 m (H)
4	1	Counter-jib part 2/2	 5.20 m (L)  1,860 kg	 1.91 m (W) 1.79 m (H)
5	1	Jib heel section	 6.46 m (L)  4,310 kg	 2.24 m (W) 2.53 m (H)
6	1	Intermediate jib section	 11.91 m (L)  3,700 kg	 1.49 m (W) 2.47 m (H)
7	1	Intermediate jib section	 10.47 m (L)  1,990 kg	 1.28 m (W) 2.50 m (H)
8	1	Intermediate jib section	 11.84 m (L)  1,860 kg	 1.28 m (W) 2.39 m (H)
9	1	Intermediate jib section	 5.24 m (L)  710 kg	 1.28 m (W) 1.89 m (H)
10	1	Intermediate jib section	 10.21 m (L)  1,090 kg	 1.28 m (W) 1.88 m (H)
11	1	Intermediate jib section	 10.16 m (L)  720 kg	 1.28 m (W) 1.84 m (H)
12	1	Intermediate jib section	 10.12 m (L)  530 kg	 1.28 m (W) 1.82 m (H)









I_i = Item Q_i = Quantity

I ₁	Q ₁	Description		
13	1	Jib head section		
			1.04 m (L)	1.27 m (W)
			80 kg	
14	1	Trolley		
			1.87 m (L)	1.51 m (W)
			300 kg	
15	1	Hook		
			1.18 m (L)	0.39 m (W)
			540 kg	
16	1	Counter-jib folding container transportation + TIE BAR		
			11.92 m (L)	1.97 m (W)
			5,900 kg	
17	1	Counter-jib folding truck transportation + TIE BAR		
			11.92 m (L)	1.95 m (W)
			5,900 kg	
18	1	Maintenance trolley		
			0.56 m (L)	0.51 m (W)
			28 kg	
19	1	Slewing platform with slewing ring and slewing ring support (MULTI KUD)		
			2.52 m (L)	2.57 m (W)
			5,070 kg	













Tower

I ₁	Q ₁	Description		
20	1	Climbable tower section	16 EC 240 TS-0390c	
				
			4.21 m (L)	1.68 m (W)
			2,120 kg	
21	1	Tower section	16 EC 240 TS-0585	
				
			6.16 m (L)	1.68 m (W)
			2,850 kg	
22	1	Tower section		
				
			L (m)	W (m)
			H (m)	kg
			12.01	1.68
			1.68	5,260
			4.14	2.30
			2.30	2,300
23	1	Long tower section	21 HC 290 TS-1242	
				
			12.42 m (L)	2.30 m (W)
			5,770 kg	
24	1	Base tower section	21 HC 290 TSB-1242c	
				
			12.42 m (L)	2.30 m (W)
			7,940 kg	

Climbing equipment






















I _i	Q _i	Description						
25	1	Climbing tower section	 L W	 H W	L (m)	W (m)	H (m)	kg
					16 EC 240 ECTS 21 HC 290 ECTS	4.21 4.14	2.18 2.30	2.18 2.45
26	1	Guide section	 L W	 H W	L (m)	W (m)	H (m)	kg
					16 EC 240 ECGS 21 HC 290	8.83 8.39	5.35 2.68	3.59 2.58
27	1	Hydraulic unit	 L W	 H W	L (m)	W (m)	H (m)	kg
					16 EC 240 ECP 21 HC 290	2.37 2.10	1.24 1.25	0.81 1.00
28	1	Climbing cross-member	 1.65 m (L)	 0.80 m (H) 0.24 m (W)				380 kg

Climbing in the building

I _i	Q _i	Description						
29	1	B-tower section 3.9 m	16 EC 240 ICBS-0390c	 4.21 m (L)	 1.68 m (H) 1.76 m (W)			2,930 kg
30	1	Internal climbing D-section	16 EC 240 ICDS-0390	 4.21 m (L)	 1.72 m (H) 1.93 m (W)			2,600 kg
31	1	Hydraulic unit	16 EC 240 ECP	 2.37 m (L)	 0.81 m (H) 1.24 m (W)			650 kg
32	1	Climbing cross-member	16 EC 240	 1.65 m (L)	 0.80 m (H) 0.24 m (W)			380 kg
33	1	Tower reinforcement	16 EC 240 TB	 1.32 m (L)	 0.23 m (H) 0.31 m (W)			70 kg
34	3	Guide frame	16 EC 240 ICGF	 2.30 m (L)	 0.61 m (H) 2.20 m (W)			910 kg
35	1	Mounting kit for 16 EC 240 ECP	16 EC 240 ECP	L (m)	W (m)	H (m)	kg	
				1.48	0.81	0.38	110	

I_i = Item Q_i = Quantity

Undercarriage

I ₁	Q ₁	Description					
36	2	Rail bogie with drive	21 HC 290	 1.63 m (L)  1,690 kg	 0.95 m (H) 0.92 m (W)		
37	2	Rail bogie without drive	21 HC 290	 1.37 m (L)  1,340 kg	 0.95 m (H) 0.62 m (W)		
38	1	Long support arm	21 HC 290	 9.10 m (L)  1,650 kg	 0.80 m (H) 0.80 m (W)		
39	2	Short support arm	21 HC 290	 4.45 m (L)  800 kg	 0.77 m (H) 0.77 m (W)		
40	2+2	Border support	21 HC 290	 5.46 - 5.40 m (L)  180 - 230 kg	 0.16 - 0.38 m (H) 0.11 - 0.18 m (W)		
41	4	Support strut	21 HC 290	 4.14 m (L)  320 kg	 0.25 m (H) 0.18 m (W)		
42	1	Undercarriage tower section	21 HC 290	 3.73 m (L)  2,920 kg	 2.62 m (H) 2.62 m (W)		
43	1	Bundle of ladders and platforms		L (m) 3.50	W (m) 1.20	H (m) 1.00	kg 1,000
44	1	Crate with small parts		L (m) 2.00	W (m) 1.00	H (m) 1.00	kg 2,000

Cruciform base

I ₁	Q ₁	Description	L (m)	W (m)	H (m)	kg	
45	1	Support arm I	20 EC 300 CB-0450m	6.86	0.50	1.18	3,790
			21 HC 290 CB-0450	6.95	0.71	1.23	5,000
			24 HC 420 CB-0600	9.20	1.10	1.53	8,300
46	1	Support arm II	20 EC 300 CB-0450m	6.86	0.87	1.05	3,360
			21 HC 290 CB-0450	6.95	0.81	1.23	4,600
			24 HC 420 CB-0600	9.20	1.10	1.53	8,300
47	2+2	Border support	20 EC 300 CB-0450m	4.20	0.90	0.60	380
			21 HC 290 CB-0450	3.67	1.20	0.50	400
			24 HC 420 CB-0600	0.43	0.43	0.64	320

This information is supplied without liability.
Subject to technical modifications!

Liebherr-Werk Biberach GmbH · Memminger Str. 120 · 88400 Biberach an der Riß, Germany
Phone +49 7351 41-0 · Fax +49 7351 41-2225 · info.lbc@liebherr.com · www.liebherr.com

TCS-002753-LBC-01 · FEM · 2022-10
Printed in Germany by leR · C7 · LBC